


Insulcon Membrane



AUGUST 23

Insulcon Pty Ltd
Technical Information

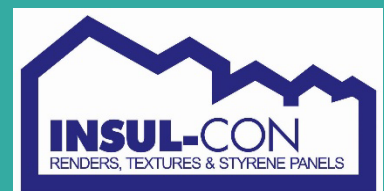

Insulcon Membrane

Product

Insulcon Membrane is a pre mixed, ready to use straight from the pail, water based acrylic protective coating. Insulcon membrane can easily be tinted to almost any colour from the most popular of colour ranges available. Insulcon membrane will enhance, protect and promote easy cleaning of any rendered or textured substrate.



Surface & Product Preparation

It is imperative that the substrate Insulcon Membrane is to be applied to is totally clean and removed of all loose paint, dirt, dust, grease, etc. Failure to do so can cause delamination resulting in damage to the finish product.

Insulcon takes no responsibility for problems arising from this.

Although Insulcon Membrane is a pre mixed ready to use product, Insulcon recommends that the drum is agitated before use. This will make sure no separation of ingredients or colour tints has occurred, therefore meaning the product is of its highest standard.

Coverage

Insulcon Membrane when used according to manufacturers directions will cover approx 40 square metres on a first coat application, and approx 60 square metres on a 2nd coat application. These may vary depending on substrate type and applicator ability.

Application

Insulcon Membrane is best applied using a roller. For maximum results in finish and protection, Insulcon Membrane should be applied in 2 coats. The 1st coat should have full coverage of the entire substrate. This will partially seal the surface of the substrate which will aid the application of the 2nd coat. The 2nd coat will be the resultant product, so extra care must be taken in this application.

Applicator should be familiar with the correct application process of Insulcon Membrane as Insulcon will take no responsibility for poor workmanship.

Insulcon Membrane should only be applied in suitable weather. Rain, frost, excessive cold/warmth and windy conditions are not suitable conditions for Insulcon. The applicator should be familiar with these common sense limitations.

NOTE –All exterior coatings will fade overtime. Dark colours have a tendency to fade quicker. Some dark colours due to excessive tinting saturation, are unable to be made.

Safety

- | | |
|---------------|--|
| If swallowed: | Rinse mouth and lips with water.
Seek medical advice if discomfort occurs. |
| If in Eyes: | Flush eyes thoroughly with flowing water for 15 minutes.
Seek medical attention symptoms persist. |
| If on skin: | Wash thoroughly with soap and water. |
| If Inhaled: | Remove subject to fresh air.
If symptoms persist seek medical attention. |

